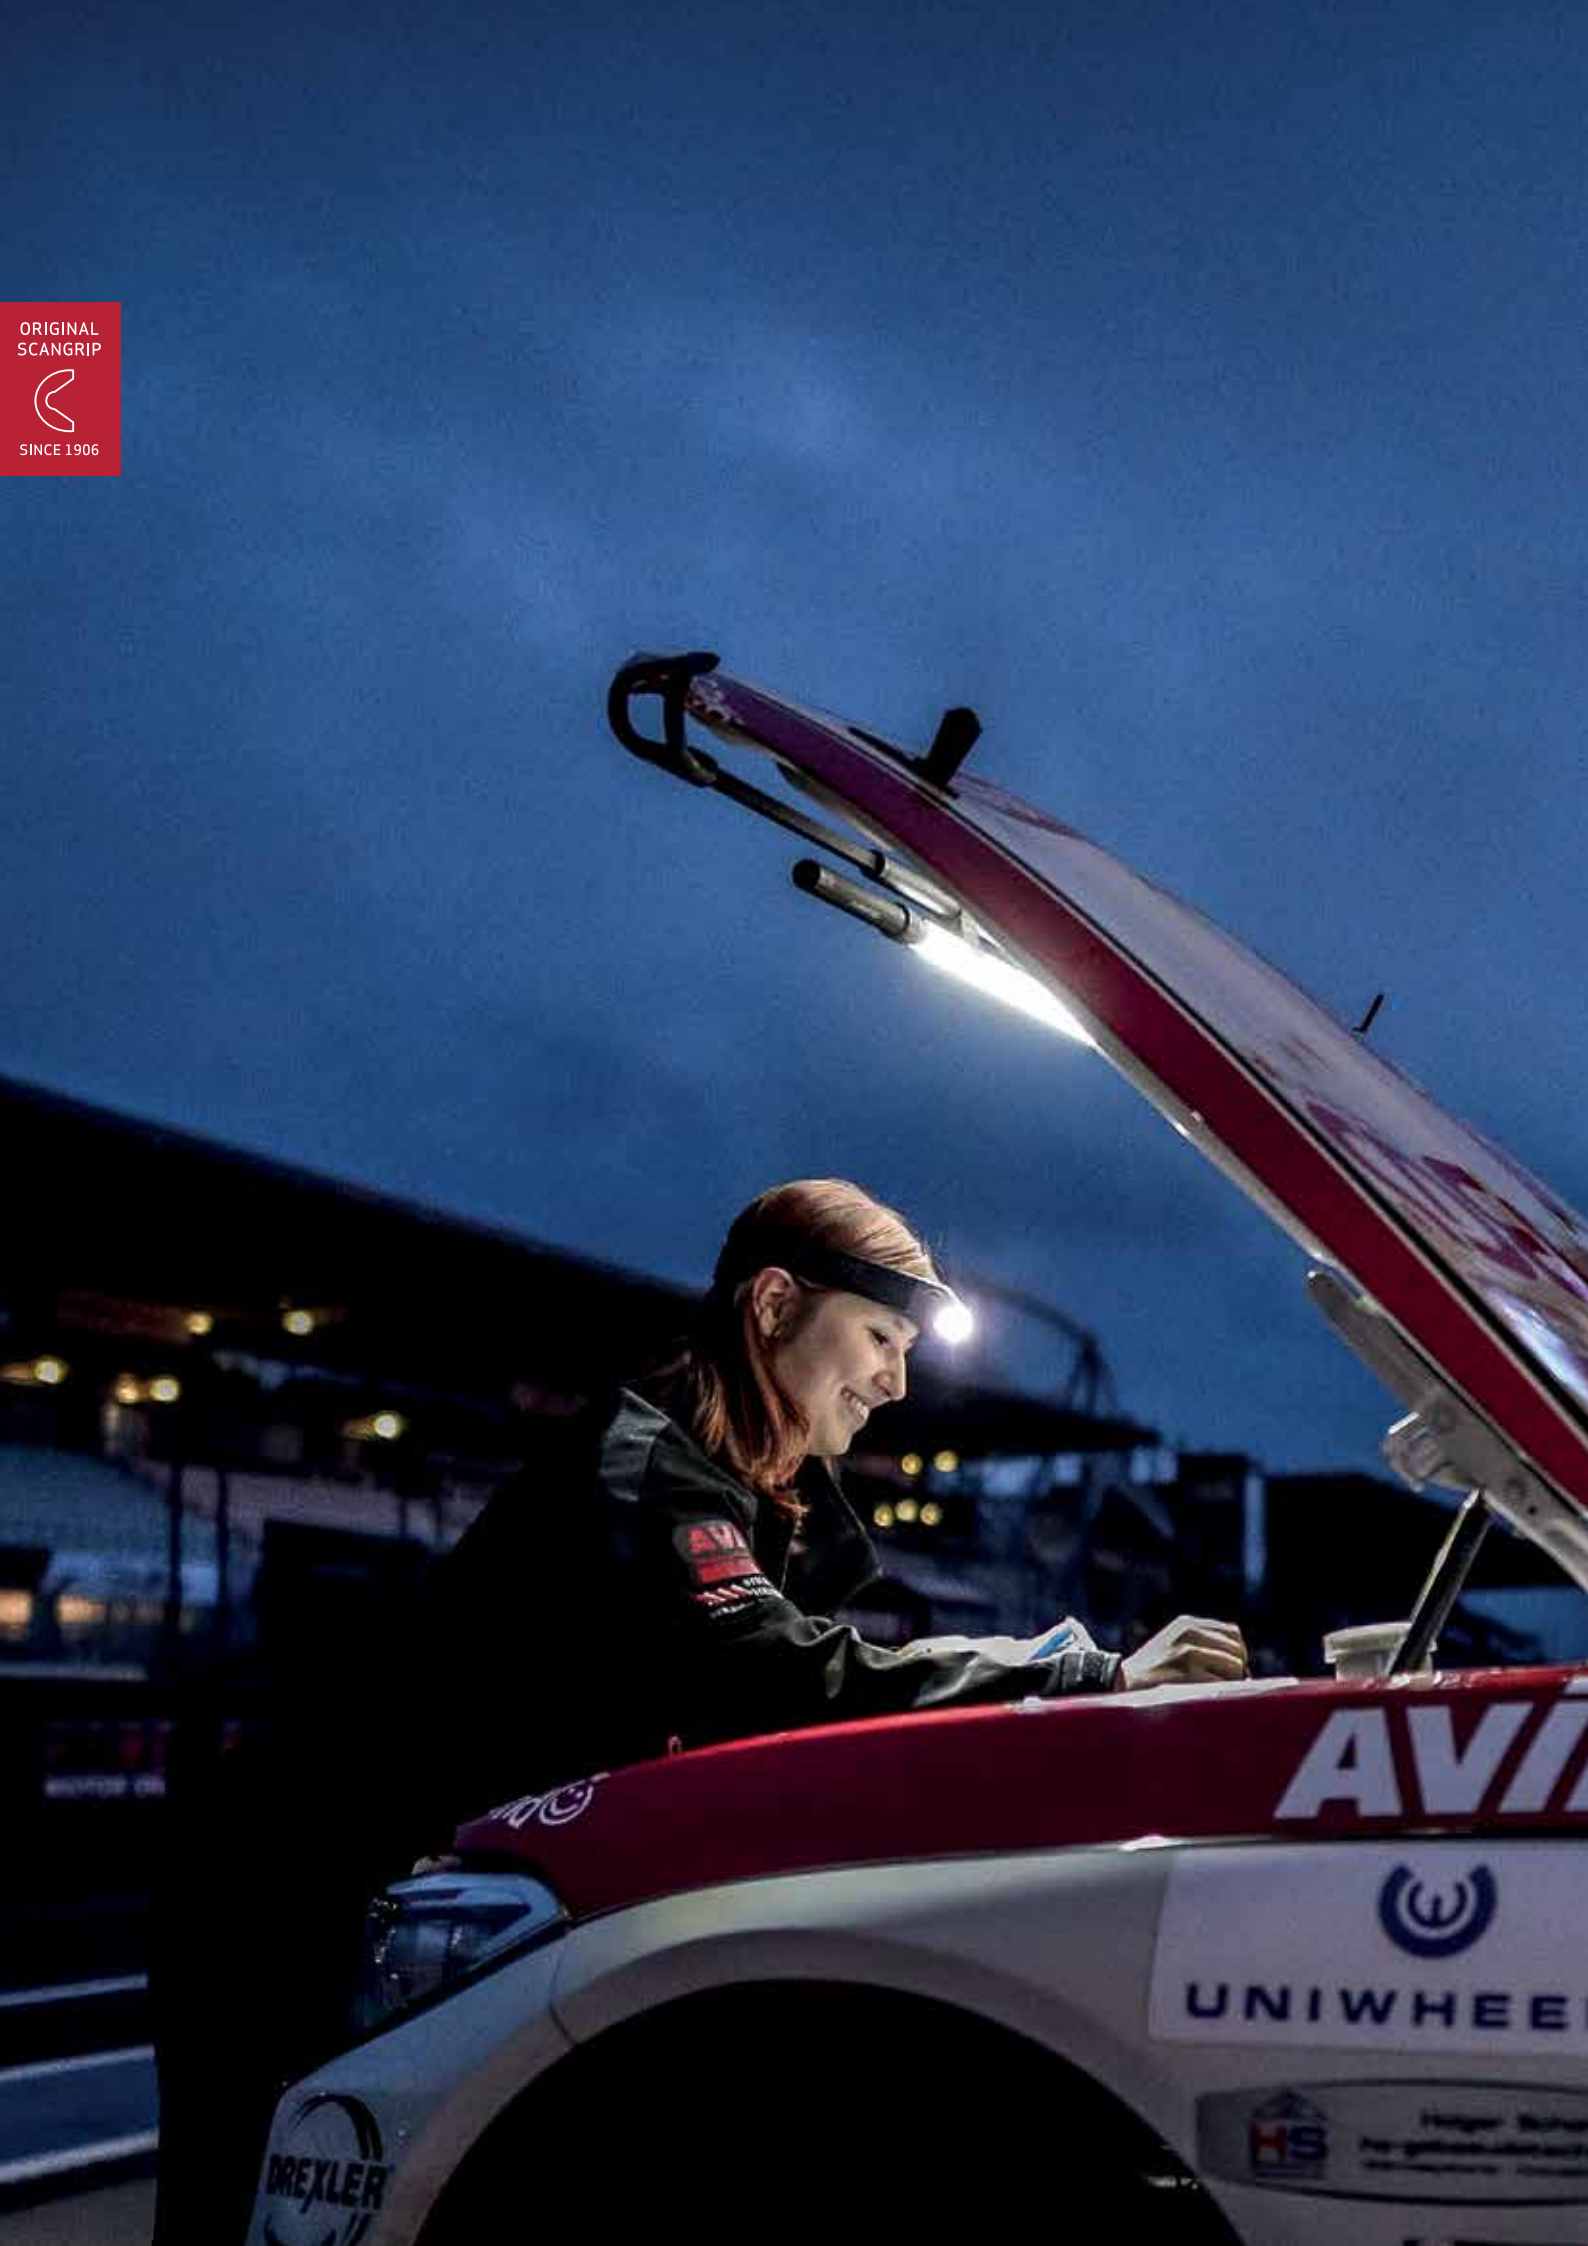
SCANGRIP®

INNOVATION FROM DENMARK

WORK LIGHTS OF THE FUTURE

PRICELIST | H1 2023


ORIGINAL
SCANGRIP
SINCE 1906
AVI
UNIWHEE
DREXLER

Pricelist

General WORK LIGHTS



WORK LIGHTS 04



CONNECT 14



LITE 20

SPECIALIZED work lights



COLOUR MATCH 24



EX PROOF 26



UV-CURING 28



ACCESSORIES 30

Discount rates

General WORK LIGHTS

A B C D E

SPECIALIZED work lights

CM EX UV

MAG series






	A MAG PEN 3	A MINI MAG PRO	A MAG	A MAG PRO
Product number	03.5116	03.5692	03.5400	03.5690
Light source	COB LED Spot: CREE XP-G2	COB LED Spot: High power LED	10 SMD LEDs Spot: High power LED	COB LED Spot: High power LED
LED performance, lumen/W	180	165	118	185
Luminous flux, lumen	15-150 Spot: 80	20-200 Spot: 80	150-300 Spot: 80	60-600 Spot: 150
Iluminance, lux@0.5 m	200 Spot: 2000	35-350 Spot: 700	250-500 Spot: 850	90-900 Spot: 2000
Adjustable light output	Stepless	Stepless	2 levels	Stepless
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	2	2.5	1.5
Operating time with min. lumen, h	20	20	5	15
Charging time, h	3.5	3	4	4
Battery	3.7 V / 750 mAh Li-on	3.7 V / 1200 mAh Li-ion	3.7 V / 2200 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP20	IP54	IP20	IP54
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 2.5 W	Max 3.5 W	Max 6.5 W
Charger incl.	No	No	Country depended	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	174 x 31 x 21 mm	200 x 40 x 28 mm	260 x 61 x 43 mm	261 x 62 x 43 mm
Net weight	78 g	157 g	252 g	339 g
Price	€ 37.90	€ 42.90	€ 52.90	€ 64.90

UNIFORM series







	A UNIPEN	A MINIFORM	A UNIFORM	A SUPERFORM	A UV-FORM
Product number	03.5420	03.5404	03.5407	03.5406	03.5408
Light source	COB LED Spot: High power LED	COB LED Spot: High power LED	COB LED Spot: High power LED	COB LED	COB LED Spot: High power UV-light
LED performance, lumen/W	125	165	150	130	128
Luminous flux, lumen	75-150 Spot: 75	100-200 Spot: 120	250-500 Spot: 175	750	125-250 Spot: UV
Iluminance, lux@0.5 m	125-250 Spot: 900	100-200 Spot: 800	475-950 Spot: 6000	1000	200-400 Spot: UV
Adjustable light output	2 levels	2 levels	2 levels	No	2 levels
Beam angle	-	110°	-	-	-
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	3	2	-	2.5
Operating time with min. lumen, h	4	6	4.5	-	5
Charging time, h	2.5	3	5	-	3
Battery	3.7 V / 750 mAh Li-ion	3.7 V / 1600 mAh Li-ion	3.6 V / 3000 mAh Li-ion	-	3.7 V / 1600 mAh Li-ion
Protection class	IP65	IP65	IP65	IP54	IP20
Impact protection	IK07	IK07	IK07	IK08	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB	5 m H05RN-F 2x1 mm²	1 m USB
Operating voltage AC	-	-	-	100-240 V	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A	-	5 V / 1 A
Power consumption	Max 1.5 W	Max 2.5 W	Max 6 W	Max 8 W	Max 3 W
Charger incl.	No	Country depended	Country depended	-	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	155 x 27 x 21 mm	122 x 60 x 28 mm	190 x 60 x 32 mm	270 x 49 x 31mm	155 x 60 x 32 mm
Net weight	80 g	130 g	263 g	710 g	156 g
Price	€ 45.90	€ 56.90	€ 89.90	€ 61.90	€ 74.90

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

SLIM series





	A MINI SLIM	A SLIM	A STAR
Product number	03.5610	03.5612	03.5620
Light source	COB LED Spot: High power LED	COB LED Spot: High power LED	COB LED
LED performance, lumen/W	170	155	140
Luminous flux, lumen	100-200 spot: 100	250-500 spot: 100	500-1000
Iluminance, lux@0.5 m	150-400 spot: 5200	400-800 spot: 4800	800-1600
Adjustable light output	2 levels	2 levels	2 levels
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2.5	2.5	2.5
Operating time with min. lumen, h	5	5	5
Charging time, h	3	4.5	8
Battery	3.7 V/1200 mAh Li-ion	3.6 V/3000 mAh Li-ion	3.7 V/5200 mAh Li-ion
Protection class	IP30	IP30	IP65
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2 W	Max 4 W	Max 8.5 W
Charger incl.	Country depended	Country depended	Country depended
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	132 x 41 x 30 mm	165 x 44 x 28 mm	156 x 103 x 98 mm
Net weight	101 g	224 g	620 g
Price	€ 62.90	€ 77.90	€ 99.90

LINE LIGHT inspection




BONNET LIGHTS



	A LINE LIGHT C+R	A LINE LIGHT R	A LINE LIGHT BONNET C+R	A NOVA BONNET
Product number	03.5243	03.5244	03.5240	03.5457
Light source	36 SMD LED Spot: CREE XP-G2	20 SMD LED Spot: CREE XP-G2	64 SMD LED	High efficiency COB LED
LED performance, lumen/W	189	189	189	160
Luminous flux, lumen	900 Spot: 150	600 Spot: 150	700-1400	200-2000
Iluminance, lux@0.5 m	1800 Spot: 1500	1200 Spot: 1500	1000-2000	300-3000
Adjustable light output	No	No	2 levels	5 levels
Beam angle	75° Spot: 50°	75° Spot: 50°	75°	-
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6500 K	6500 K	6500 K	6000 K
Operating time with max. lumen, h	2.5 Spot: 8	1.5 Spot: 4	1.5	2
Operating time with min. lumen, h	-	-	3	20
Charging time, h	4	6	4	5
Battery	3.7 V / 5200 mAh Li-ion	3.7 V / 2600 mAh Li-ion	3.7 V / 5200 mAh Li-ion	7.3 V / 4000 mAh Li-ion
Protection class	IP65	IP65	IP65	IP67
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	5 m / 2 x 1 mm² H05RN-F	1 m USB	5 m / 2 x 1.0 mm² H05RN-F	1 m USB
Operating voltage AC	-	-	-	-
Charging voltage/current DC	4.2 V / 3.5 A	5 V / 1 A	4.2 V / 3.5 A	5 V / 2 A
Power consumption	Max 8 W	Max 5.5 W	Max 13 W	Max 16 W
Charger incl.	Yes	Country depended	Yes	Yes
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 461 mm	ø25 x 357 mm	ø25 x 1017 mm	1135 x 220 x 163 mm
Net weight	300 g	220 g	470 g (980 g incl. rack)	1.69 kg (NOVA R 790 g)
Price	€ 104.90	€ 92.90	€ 169.90	€ 149.90

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

Headlamps





	A ZONE 2	A ZOOM	A NIGHT VIEW
Product number	03.5850	03.5627	03.5438
Light source	COB LED	LED	Ultra high CRI + COB LED
LED performance, lumen/W	155	120	100
Luminous flux, lumen	20/100/200 (Step 1/2/3)	10/80/220 (Step 1/2/3)	80-160
Iluminance, lux@0.5 m	40-400	55-1200	250-500
Adjustable light output	3 levels	3 levels	2 levels
Beam angle	120° / 60°	10° / 70°	120° / 60°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K RED 632 nm
Operating time with max. lumen, h	2	4.5	2.5
Operating time with min. lumen, h	22	19	5
Charging time, h	2.5	2.5	4
Battery	3.7 V/1200 mAh Li-ion	3.7V/2000 mAh Li-ion	3.8 V / 1600 mAh Li-ion
Protection class	IP54	IP54	IP65
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	1 m USB	1 m USB
Operating voltage AC	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 1 A
Power consumption	Max 2.5 W	Max 5.5 W	Max 3 W
Charger incl.	No	No	Country depended
Temperature	-10 to +40 °C	-10° to +40°C	-10 to +40 °C
Dimensions	84 x 31 x 37 mm	78 x 46.4 x 46.6 mm	105 x 52 x 43 mm
Net weight	75 g	109 g	130 g
Price	€ 39.90	€ 29.90	€ 79.90



Optional accessory for
03.5626 I-VIEW



	A I-VIEW	C POWERBANK
Product number	03.5626	03.5782
Light source	COB LED	-
LED performance, lumen/W	175	-
Luminous flux, lumen	40-400	-
Iluminance, lux@0.5 m	100-1000	-
Adjustable light output	Stepless	-
Beam angle	120° / 60°	-
CRI	Ra > 80	-
CCT	6000 K	-
Operating time with max. lumen, h	1.5	-
Operating time with min. lumen, h	15	-
Charging time, h	3.5	3
Battery	3.8 V / 1600 mAh Li-ion	3.65 V / 4000 mAh
Protection class	IP65	IP20
Impact protection	IK07	IK07
Impact resistance	1 m	1 m
Cable	1 m USB	Spiral cable
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V/ 2 A
Power consumption	Max 3.25 W	Max 8 W
Charger incl.	No	-
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	100 x 50 x 38 mm	ø28 x 103 mm
Net weight	100 g	132 g
Price	€ 71.90	€ 26.90

SEE MORES ABOUT
SCANGRIP HEADLAMPS

C ACCESSORIES		Product number	Price
	HARD HAT BRACKET For 03.5625 I-VIEW	03.5797	€ 14.90
	ADHESIVE MOUNTING BASES For 03.5797 HARD HAT BRACKET	03.5798	€ 7.90

Lighting to wear



	C FLEX WEAR
Product number	03.5810
Light source	COB LED / LED
LED performance, lumen/W	160
Luminous flux, lumen	75/150 (Step 1/2) Spot: 100
Illuminance, lux@0.5 m	110/210 Spot: 2200
Adjustable light output	2 levels
Beam angle	110° / 14°
CRI	Ra > 80
CCT	6000 K
Operating time with max. lumen, h	2
Operating time with min. lumen, h	4
Charging time, h	2.5
Battery	3.7V/800 mAh Li-ion
Protection class	IP20
Impact protection	IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 1.5 W
Charger incl.	No
Temperature	-10° to +40°C
Dimensions	89 x 26 x 21 mm
Net weight	42 g
Price	€ 29.90

FLEX WEAR KIT

C		Product number	Price
	FLEX WEAR KIT : FLEX WEAR including headband and cap mount	03.5811	€ 39.90

SEE MORE ABOUT FLEX WEAR



NOVA rechargeable series






	A NOVA MINI	A NOVA R	B NOVA 4K C+R	B NOVA 6K C+R
Product number	03.6010	03.5456	03.5441	03.5443
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	155	160	170	160
Luminous flux, lumen	100-1000	200-2000	400-4000	600-6000
Iluminance, lux@0.5 m	150-1500	300-3000	500-5000	800-8000
Adjustable light output	Stepless	5 levels	5 levels	5 levels
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1.5	2	1	1
Operating time with min. lumen, h	15	20	14	12
Charging time, h	5	5	2	2
Battery	3.65 V / 4000 mAh	7.3 V / 4000 mAh Li-ion	11.1 V / 4400 mAh Li-ion	11.1 V / 5200 mAh Li-ion
Protection class	IP65	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	1 m USB	1 m USB	5 m / 2 x 0,75 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F
Operating voltage AC	-	-	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 2 A	12.6 V / 2.4 A	12.6 V / 4.3 A
Power consumption	Max 10 W	Max 16 W	Max 29 W	Max 42 W
Charger incl.	No	Yes	Yes	Yes
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	104 x 38 x 96 mm	163 x 63 x 163 mm	235 x 88 x 233 mm	267 x 87 x 262 mm
Net weight	254 g	790 g	2.3 kg	2.91 kg
Price	€ 74.90	€ 104.90	€ 209.90	€ 249.90

NOVA cable series





	B NOVA 4K	B NOVA 6K	B NOVA 12 K
Product number	03.5440	03.5442	03.5444
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	160	160	170
Luminous flux, lumen	400-4000	600-6000	1200-12000
Iluminance, lux@0.5 m	600-6000	900-9000	1800-18000
Adjustable light output	5 levels	5 levels	5 levels
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-
Operating time with min. lumen, h	-	-	-
Battery	-	-	-
Protection class	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Cable	5 m / 3 x 1 mm² H05RN-F	5 m / 3 x 1 mm² H05RN-F	5 m / 3 x 1 mm² H05RN-F
Operating voltage AC	100-240 V	100-240 V	100-240 V
Charging voltage/current DC	-	-	-
Power consumption	Max 30 W	Max 42 W	Max 86 W
Charger incl.	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	235 x 88 x 233 mm	267 x 87 x 262 mm	302 x 102 x 298 mm
Net weight	2.38 kg	2.66 kg	4 kg
Price	€ 134.90	€ 154.90	€ 279.90

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

NOVA SPS series





AREA 10 SPS



	B NOVA 4 SPS	B NOVA 6 SPS	B NOVA 10 SPS	B AREA 10 SPS
Product number	03.6000	03.6001	03.6002	03.6009
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED	224 SMD LEDs
LED performance, lumen/W	175	185	185	177
Luminous flux, lumen	400-4000	600-6000	1000-10000	360°: 1000-10000 / 180°: 500-5000
Iluminance, lux@0.5 m	600-6000	900-9000	1600-16000	300-30000
Adjustable light output	5 levels	5 levels	5 levels	5 levels
Beam angle	115°	115°	115°	360° / 180°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1.5	2	1	360°: 1 / 180°: 2
Operating time with min. lumen, h	15	20	10	360°: 10 / 180°: 20
Charging time, h	1.5*	2*	1.5*	2*
Battery	11.1 V / 4000 mAh Li-ion	11.1 V / 8000 mAh Li-ion	11.1 V / 8000 mAh Li-ion	11.1V / 8000 mAh Li-ion
Protection class	IP67	IP67	IP67	IP65
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Charging voltage/current DC	12.6 V / 2.8 A	12.6 V / 4 A	12.6 V / 6.8 A	12.6 V / 6.8 A
Power consumption	Max 30 W	Max 45 W	Max 75 W	Max 84 W
Battery incl.	SPS BATTERY 03.6003	SPS BATTERY 03.6004	SPS BATTERY 03.6004	SPS BATTERY 03.6004
Charger incl.	SPS CHARGING SYSTEM 35 W 03.6006	SPS CHARGING SYSTEM 50 W 03.6007	SPS CHARGING SYSTEM 85 W 03.6008	SPS CHARGING SYSTEM 85 W 03.6008
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	240 x 230 x 104 mm	270 x 260 x 120 mm	305 x 290 x 125 mm	380 x 198 x 198 mm
Net weight	1.97 kg	2.69 kg	3.6 kg	3.8 kg
Price	€ 244.90	€ 299.90	€ 384.90	€ 419.90

* 80%

SCANGRIP POWER SOLUTION accessories



C	SPS BATTERY 4Ah	SPS BATTERY 8Ah	SPS CHARGING SYSTEM 35W	SPS CHARGING SYSTEM 50W	SPS CHARGING SYSTEM 85W
Product number	03.6003	03.6004	03.6006	03.6007	03.6008
Battery	11.1 V / 4000 mAh Li-ion	11.1 V / 8000 mAh Li-ion	-	-	-
Charging voltage, current DC	12.6 V / 2.8 A	12.6 V / 6.8 A	12.6 V / 2.8 A	12.6 V / 4 A	12.6 V / 6.8 A
Cable	-	-	5 m / 2 x 0,75 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F
Charger input voltage	-	-	100-240V AC 50/60 Hz	100-240V AC 50/60 Hz	100-240V AC 50/60 Hz
Power consumption	-	-	Max 35 W	Max 50 W	Max 85 W
Charging time, h	1.5*	1.5*	-	-	-
Protection class	IP67	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	103 x 75 x 40 mm	103 x 75 x 62 mm	139 x 75 x 40 mm	139 x 75 x 49 mm	139 x 75 x 49 mm
Net weight	320 g	560 g	650 g	700 g	760 g
Price	€ 42.90	€ 74.90	€ 42.90	€ 53.90	€ 74.90

* 80%

SEE VIDEO WITH NOVA SPS WORK LIGHTS WITH EXCHANGEABLE BATTERY SYSTEM

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

SITE LIGHT series





	E SITE LIGHT 40	E SITE LIGHT 80
Product number	03.5268	03.5269
Light source	432 SMD LEDs	864 SMD LEDs
LED performance, lumen/W	189	189
Luminous flux, lumen	10000-40000	20000-80000
Iluminance, lux@0.5 m	-	-
Adjustable light output	4 levels	4 levels
Beam angle	120°	120°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	-	-
Operating time with min. lumen, h	-	-
Charging time, h	-	-
Battery	-	-
Protection class	IP65	IP65
Impact protection	IK08	IK08
Impact resistance	1 m	1 m
Cable	10 m / 3 x 1 mm² H07RN-F	10 m / 3 x 1 mm² H07RN-F
Operating voltage AC	220-240 V	220-240 V
Charging voltage/current DC	-	-
Power consumption	Max 315 W	Max 630 W
Charger incl.	-	-
Temperature	-25 to +40 °C	-25 to +40 °C
Dimensions	278 x 241 x 160 mm	415 x 241 x 160 mm
Net weight	4.95 kg	6.70 kg
Price	€ 639.90	€ 1069.90

SEE MORE ABOUT SITE LIGHT

C ACCESSORIES		Product number	Price
	SCANGRIP TRIPOD 4.5m Air cushioned tripod for positioning of SITE LIGHTs, 2.2 - 4.5 m	03.5270	€ 269.90
	DUAL BRACKET for 4.5m TRIPOD For positioning of two SITE LIGHTs	03.5758	€ 53.90
	TRANSPORT CASE SITE LIGHT 80 TRANSPORT CASE SITE LIGHT 40 The transport cases enable you to safely transport your SITE LIGHT work light to the building site. They are sturdy and high-quality cases that can withstand shocks and rough handling during transport.	49.0351 49.0350	€ 171.90 € 96.90

Go to scangrip.com to see other accessories available

FLASH series






	A FLASH PENCIL	A FLASH PEN	A FLASH 300	A FLASH 600	A FLASH MICRO R
Product number	03.5130	03.5131	03.5132	03.5133	03.5113
Light source	LUMILEDS	CREE	CREE	CREE	LED
LED performance, lumen/W	124	142	165	165	103
Luminous flux, lumen	75	100-200	150-300	300-600	7.5-75
Illuminance, lux@0.5 m	1500	500-8000	600-10000	1000-20000	2.5
Adjustable light output	No	BOOST mode	BOOST mode	BOOST mode	Stepless
Beam angle	15°	10°-60°	10°-60°	10°-60°	110°
Beam distance	40 m	80 m	100 m	150 m	10 m
CRI	Ra > 70	Ra > 70	Ra >65	Ra >65	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2.5	3.5	3	2	0.25
Operating time with min. lumen, h	-	-	-	-	2.5
Charging time, h	-	-	-	-	2.5
Battery	2 x AAAA / 1.5 V Alkaline	2 x AAA / 1.5 V Alkaline	3 x AAA / 1.5 V Alkaline	2 x C / 1.5 V Alkaline	3.7 V / 100 mAh Li-ion
Protection class	IP54	IP54	IP54	IP54	IP20
Impact protection	IK07	IK07	IK07	IK07	-
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	-	-	-	-	USB cable
Charging voltage/current DC	-	-	-	-	-
Power consumption	Max 1.6 W	Max 1.2 W	Max 4.8 W	Max 7 W	Max 1.2 W
Charger incl.	-	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø15 x 131mm	ø20 x 153 mm	ø32 x 133 mm	ø36 x 174 mm	55 x 15 x 25 mm
Net weight	32 g	62 g	122 g	292 g	17 g
Price	€ 19.90	€ 27.90	€ 34.90	€ 44.90	€ 14.90

FLASH R series







	A FLASH 12-24V	A WORK PEN 200 R	A FLASH PEN R	A FLASH 600 R	A FLASH 1000 R
Product number	03.5124	03.5127	03.5136	03.5137	03.5138
Light source	SAMSUNG LED	COB LED / CREE	CREE	CREE	CREE
LED performance, lumen/W	140	120	165	165	148
Luminous flux, lumen	130	20-200 Spot: 150	150-300	300-600	500-1000
Illuminance, lux@0.5 m	900-8000	400 Spot: 3500	600-10000	1000-20000	3000-60000
Adjustable light output	No	Stepless	BOOST mode	BOOST mode	BOOST mode
Beam angle	10°-70°	105° / 20°	10°-60°	10°-70°	10°-60°
Beam distance	100 m	40 m	100 m	150 m	250 m
CRI	Ra > 70	Ra > 80	Ra > 65	Ra > 65	Ra > 70
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1	1	7	7	5
Operating time with min. lumen, h	-	10	-	-	-
Charging time, h	2	2.5	3	4	4
Battery	3.7 V / 550 mAh Li-ion	3.7 V / 750 mAh Li-ion	3.7V / 1100 mAh Li-ion	3.7V / 2600 mAh Li-ion	3.7V / 4000 mAh Li-ion
Protection class	IP30	IP30	IP54	IP54	IP54
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	Cigarette Plug Connector	1 m USB	1 m USB	1 m USB	1 m USB
Charging voltage/current DC	10-28 V	5 V / 1 A	5 V / 1 A	5 V / 1 A	5 V / 2 A
Power consumption	Max 2 W	4 W	4 W	6 W	12 W
Charger incl.	No	No	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø30 x 105 mm	ø21 x 172 mm	ø24 x 169 mm	ø38 x 185 mm	ø42 x 196 mm
Net weight	88 g (100 g with cover)	54 g	83 g	253 g	345 g
Price	€ 29.90	€ 29.90	€ 39.90	€ 49.90	€ 69.90

SCANGRIP flashlights are tested according to the ANSI/NEMA FL1 standard

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

LINE LIGHT series





	A LINE LIGHT 2-POST	A LINE LIGHT 1	A LINE LIGHT 2	A LINE LIGHT 4	A LINE LIGHT 6
Product number	03.5225	03.5203	03.5202	03.5201	03.5200
Light source	2 x 96 SMD LED	216 SMD LED	2 x 156 SMD LED	4 x 216 SMD LED	6 x 216 SMD LED
LED performance, lumen/W	189	189	189	189	189
Luminous flux, lumen	2 x 12.5-1250	2750	2 x 2000	4 x 2750	6 x 2750
Iluminance, lux@0.5 m	2 x 20-2000	3000	2 x 2800	4 x 27.5-2750	6 x 3000
Adjustable light output	Stepless	No	No	Stepless	No
Beam angle	75°	75°	75°	75°	75°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-	-	-
Operating time with min. lumen, h	-	-	-	-	-
Charging time, h	-	-	-	-	-
Battery	-	-	-	-	-
Protection class	IP67	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²	8 m / H03VV-F 2 x 0.5 mm²
Operating voltage AC	-	-	-	-	-
Charging voltage/current DC	24 V	24 V	24 V	24 V	24 V
Power consumption	Max 2 x 24 W	Max 26 W	Max 2 x 38 W	Max 4 x 104 W	Max 6 x 156 W
Power supply incl.	25 W POWER SUPPLY UNIT 03.5229	25 W POWER SUPPLY UNIT 03.5229	80 W POWER SUPPLY UNIT 03.5226	80 W POWER SUPPLY UNIT 03.5226	2 x 80 W POWER SUPPLY UNIT 03.5226
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	2 x ø25 x 770 mm	ø25 x 1630 mm	2 x ø25 x 1234 mm	4 x ø25 x 1630 mm	6 x ø25 x 1630 mm
Net weight*	4.1 kg	2.03 kg	4,52 kg	6.7 kg	10.24 kg
Price	€ 403.90	€ 241.90	€ 393.90	€ 1009.90	€ 1514.90

*Weight includes all parts and accessories included

LINE LIGHT series



	A LINE LIGHT 75	A LINE LIGHT 120	A LINE LIGHT 160	A LINE LIGHT 200
Product number	03.5221	03.5222	03.5223	03.5224
Light source	96 SMD LED	156 SMD LED	216 SMD LED	276 SMD LED
LED performance, lumen/W	189	189	189	189
Luminous flux, lumen	1250	2000	2750	3500
Iluminance, lux@0.5 m	2000	2800	3000	3200
Adjustable light output	No	No	No	No
Beam angle	75°	75°	75°	75°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	-	-	-
Operating time with min. lumen, h	-	-	-	-
Charging time, h	-	-	-	-
Battery	-	-	-	-
Protection class	IP67	IP67	IP67	IP67
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Cable	-	-	-	-
Operating voltage AC	-	-	-	-
Charging voltage/current DC	24 V	24 V	24 V	24 V
Power consumption	Max 10 W	Max 16 W	Max 22 W	Max 28 W
Power supply incl.	-	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø25 x 838 mm	ø25 x 1234 mm	ø25 x 1630 mm	ø25 x 2027 mm
Net weight*	390 g	530 g	670 g	860 g
Price	€ 120.90	€ 201.90	€ 231.90	€ 272.90

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

LINE LIGHT accessories

Combine LINE LIGHT lighting units with power supply, cable and suitable suspensions. A range of flexible suspensions makes it possible to position the lighting units exactly where you need it.

POWER SUPPLY/CABLE		Product number	Price
	A LINE LIGHT DIMMER	03.5264	€ 70.90
2 m cable  5 m cable	A 25 W power supply unit	03.5229	€ 31.50
2 m cable  5 m cable	A 80 W power supply unit	03.5226	€ 51.90
	C POWER CABLE 8 m	03.5215	€ 8.50

SUSPENSIONS		Product number	Price
	C CLIP - 1 pc. - incl. fittings for suspension	03.5214	€ 6.70
	C CLIP - 1 pc. - incl. fittings for suspension	03.5216	€ 23.90
	C CLIP with ø30 mm magnet for suspension	03.5279	€ 20.90
	C LARGE MAGNET - ø60 mm with clip	03.5276	€ 26.90
	C FLEXIBLE MAGNET SUSPENSION - Ball socket joint with strong magnet for suspension for LINE LIGHT 2-POST	03.5257	€ 42.90
	C MAGNET - With small clip - ø30 mm	03.5246	€ 15.90
	C CLIP - Small metal clip	03.5213	€ 4.20
	C GOOSENECK - 20 cm flexible arm with clip holder and ø60 mm suction cup	03.5219	€ 26.90
	C GOOSENECK - 20 cm flexible arm with clip holder and ø60 mm magnet	03.5218	€ 31.90
	C HOOK - Adjustable hook with clip holder and magnet	03.5312	€ 11.90

Go to scangrip.com to see other accessories available



FOR MORE INFORMATION ON THE WORK LIGHTS PRODUCT RANGE AT SCANGRIP.COM

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

One lighting solution for all battery packs

JUST CONNECT

Compatible with AMPSHARE - BERNER - BOSCH - BOSCH GREEN - DEWALT - EINHELL - FEIN - FESTOOL FLEX - HAZET - HIKOKI - INGERSOLL - MAKITA - METABO - MILWAUKEE - PANASONIC - RIDGID - SNAP-ON - WÜRTH



NOVA **CONNECT** series





	D NOVA 2 CONNECT	D NOVA 4 CONNECT	D NOVA 10 CONNECT
Product number	03.6100C	03.6101C	03.6102C
Light source	High efficiency COB LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	165	160	165
Luminous flux, lumen	200-2000	400-4000	1000-10000
Iluminance, lux@0.5 m	300-3000	600-6000	1600-16000
Adjustable light output	5 levels	5 levels	5 levels
Beam angle	100°	110°	110°
CRI	Ra › 80	Ra › 80	Ra › 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	5.75@18 V 5.2 Ah battery	3 @18 V 5.2 Ah battery	1.25@18 V 5.2 Ah battery
Operating time with min. lumen, h	58@18 V 5.2 Ah battery	31@18 V 5.2 Ah battery	12@18 V 5.2 Ah battery
Operating time: backup battery, h	-	2.5@10% /400 lm	1@10% / 1000 lm
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP65 IP54 with battery cover	IP65 IP54 with battery cover
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 16 W	Max 30 W	Max 75 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply Incl.	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	161 x 164 x 78 mm	263 x 230 x 119 mm	304 x 292 x 131 mm
Net weight	720 g	2.36 kg	3.72 kg
Price	€ 94.90	€ 179.90	€ 289.90

GENERAL work lights A B C D E SPECIALIZED work lights CM EX UV

VEGA **CONNECT** series




	D VEGA 2 CONNECT	D VEGA 4 CONNECT
Product number	03.6106C	03.6104C
Light source	60 LEDs	105 LEDs
LED performance, lumen/W	189	189
Luminous flux, lumen	1000 / 2000 (step 1 /2)	2000 / 4000 (step 1 / 2)
Illuminance, lux@0.5 m	1500 / 3000 (step 1 / 2)	3000 / 6000 (step 1 / 2)
Adjustable light output	2 levels	2 levels
Beam angle	100°	100°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time with max. lumen, h	4.5@18 V 5.2 Ah battery	2.25@18 V 5.2 Ah battery
Operating time with min. lumen, h	9@18 V 5.2 Ah battery	4.5@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP54 with power supply IP30 with battery	IP54 with power supply IP30 with battery
Impact protection	IK06	IK07
Impact resistance	1 m	1 m
Charger input voltage	-	-
Power consumption	Max 20W	Max 40 W
Battery incl.	No	No
Charger incl.	No	No
Power supply incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	200 x 208 x 78 mm	280 x 289 x 103 mm
Net weight	850 g	2.02 kg
Price	€ 79.90	€ 129.90

Use your 18 V/20 V battery pack for SCANGRIP CONNECT work lights



FOR MORE INFORMATION ON THE CONNECT PRODUCT RANGE AT SCANGRIP.COM

AREA **CONNECT** series





	D AREA 10 CONNECT	D AREA 6 CONNECT	D BASIC CONNECT
Product number	03.6103C	03.6108C	03.6109C
Light source	240 LEDs	160 LEDs	30 LEDs
LED performance, lumen/W	189	189	189
Luminous flux, lumen	360°: 1000-10000 /180°: 500-5000	3000 / 6000 (step 1 / 2)	500 / 1000 (step 1 / 2)
Illuminance, lux@0.5 m	300-3000	1500 / 3000 (step 1 / 2)	650 / 1300 (step 1 / 2)
Adjustable light output	5 levels	2 levels	2 levels
Beam angle	360° / 180°	360°	110°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	1@18 V 5.2 Ah battery	1.75@18 V 5.2 Ah battery	9@18 V 5.2 Ah battery
Operating time with min. lumen, h	22@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery	18@18 V 5.2 Ah battery
Operating time: backup battery, h	50min@10 % / 1000 lm	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP65 IP54 with battery cover	IP54 with power supply IP30 with battery	IP30
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 84 W	Max 54 W	Max 10.5 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply incl.	No	No	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	395 x 200 x 212 mm	ø195 x 363 mm	158 x 79 x 62 mm
Net weight	3.7 kg	1.97 kg	340 g
Price	€ 289.90	€ 179.90	€ 59.90

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

MULTILIGHT **CONNECT** series





D	MULTILIGHT SEARCH CONNECT	MULTILIGHT FLEX CONNECT	MULTILIGHT FLOOD CONNECT
Product number	03.5695C	03.5693C	03.5694C
Light source	High power LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	143	160	153
Luminous flux, lumen	300-600	375-750	750-1500
Iluminance, lux@0.5 m	2200-26000	600-1200	1200-2400
Adjustable light output	2 levels	2 levels	2 levels
Beam angle	10° - 70°	110°	110°
CRI	Ra > 70	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	12@18 V 5.2 Ah battery	12.5@18 V 5.2 Ah battery	6.5@18V 5.2 Ah battery
Operating time with min. lumen, h	24@18 V 5.2 Ah battery	26@18 V 5.2 Ah battery	13@18V 5.2 Ah battery
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 8 W	Max 7.5 W	Max 14.5 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply Incl.	No	No	No
Max Load	-	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	186 x 79 x 203 mm	168 x 79 x 203 mm	145 x 116 x 197 mm
Net weight	466 g	376 g	611 g
Price	€ 89.90	€ 89.90	€ 94.90






D	MULTILIGHT BODY CONNECT	SEARCH HEAD CONNECT	FLEX HEAD CONNECT	FLOOD HEAD CONNECT
Product number	03.5696C	03.5699C	03.5697C	03.5698C
Light source	-	High power LED	High efficiency COB LED	High efficiency COB LED
LED performance, lumen/W	-	143	160	153
Luminous flux, lumen	-	300-600	375-750	750-1500
Iluminance, lux@0.5 m	1100-13000	2200-26000	600-1200	1200-2400
Adjustable light output	2 levels	2 levels	2 levels	2 levels
Beam angle	-	10° - 70°	110°	110°
CRI	-	Ra > 70	Ra > 80	Ra > 80
CCT	-	6000 K	6000 K	6000 K
Operating time with max. lumen, h	-	12@18 V 5.2 Ah battery	12.5@18 V 5.2 Ah battery	6.5@18 V 5.2 Ah battery
Operating time with min. lumen, h	-	24@18 V 5.2 Ah battery	26@18 V 5.2 Ah battery	13@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m	1 m
Charger input voltage	-	-	-	-
Power consumption	-	Max 8 W	Max 7.5 W	Max 14.5 W
Battery incl.	No	No	No	No
Charger incl.	No	No	No	No
Power supply Incl.	No	No	No	No
Max load	90 W	-	-	-
Temperature	-10 to +40 °C	-10° to +40°C	-10 to +40 °C	-10 to +40 °C
Dimensions	114 x 202 x 78 mm	92 x 49 x 49 mm	244 x 41 x 41 mm	57 x 116 x 106 mm
Net weight	271 g	195 g	105 g	340 g
Price	€ 54.90	€ 44.90	€ 44.90	€ 49.90

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

MULTILIGHT CONNECT

New flexible concept of hand-held work light with multiple, exchangeable light heads





FOR MORE INFORMATION ON THE MULTILIGHT CONNECT PRODUCT RANGE AT SCANGRIP.COM

DUO / TOWER **CONNECT**





	D DUO CONNECT	D TOWER COMPACT CONNECT	D TOWER 5 CONNECT
Product number	03.6111C	03.6110C	03.6105C
Light source	2 x 40 LEDs	2 x 40 LEDs	120 LEDs
LED performance, lumen/W	189	189	189
Luminous flux, lumen	1250 / 2500 (step 1 / 2)	1250 / 2500 (step 1 / 2)	2500 / 5000 (step 1 / 2)
Iluminance, lux@0.5 m	900 / 1800 (step 1 / 2)	900 / 1800 (step 1 / 2)	4000 / 8000 (step 1 / 2)
Adjustable light output	2 levels	2 levels	2 levels
Beam angle	180°	180°	110°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	4.5@18 V 5.2 Ah battery	4.5@18V 5.2 Ah battery	2@18 V 5.2 Ah battery
Operating time with min. lumen, h	9.5@18 V 5.2 Ah battery	9.5@18V 5.2 Ah battery	4.5@18 V 5.2 Ah battery
Operating time: backup battery, h	-	-	-
Battery	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR	Compatible with METABO / CAS battery system 18 V and all other 18 V/20 V battery packs by using the SCANGRIP CONNECTOR
Protection class	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07
Impact resistance	1 m	1 m	1 m
Charger input voltage	-	-	-
Power consumption	Max 19.5 W	Max 19.5 W	Max 45 W
Battery incl.	No	No	No
Charger incl.	No	No	No
Power supply incl.	No	No	No
Temperature	-10 to +40 °C	-10° to +40°C	-10 to +40 °C
Dimensions	224 x 78 x 91 mm	956 x 78 x 91mm	121 x 153 x 892 mm
Net weight	620 g	2.74 kg (incl. stand)	5.2 kg
Price	€ 79.90	€ 169.90	€ 244.90

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

CONNECTORS

D SCANGRIP CONNECTORs for 18 V/20 V battery packs		Price
BERNER	03.6155C	€ 9.90
BOSCH / AMPSHARE	03.6140C	€ 9.90
BOSCH GREEN	03.6141C	€ 9.90
DEWALT	03.6142C	€ 9.90
EINHELL	03.6143C	€ 9.90
FEIN	03.6144C	€ 9.90
FESTOOL	03.6153C	€ 9.90
FLEX	03.6145C	€ 9.90
HAZET	03.6146C	€ 9.90
HIKOKI	03.6147C	€ 9.90
INGERSOLL	03.6152C	€ 9.90
MAKITA	03.6148C	€ 9.90
MILWAUKEE	03.6149C	€ 9.90
PANASONIC	03.6156C	€ 9.90
RIDGID	03.6154C	€ 9.90
SNAP-ON	03.6151C	€ 9.90
WÜRTH	03.6150C	€ 9.90



BATTERY SAFETY SYSTEM

- Automatic discharge protection
- Overload protection
- Temperature surveillance
- Approved by TÜV Rheinland

Scan QR code to see TÜV Rheinland test report

Accessories







D	CONNECT POWER SUPPLY	CAS BATTERY 18V Li-POWER 5.2Ah	CAS CHARGER SC30
Product number	03.6123C	03.6121	03.6122
Battery	-	18 V 5.2 Ah Li-power	-
Cable	5m / 2 x 0.75 mm² H05RN-F	-	1.35 m / 2 x 0.75mm² H03V VH2-F
Charger input voltage	100-240V AC 50/60 Hz	-	220-240V AC 50/60 Hz
Output power	Max 90 W	-	Max 30 W
Charging time, h	-	208 min @100 % with CAS charger 03.6122	-
Protection class	IP65	IP20	IP20
Impact protection	IK07	-	-
Impact resistance	1 m	-	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	124 x 83 x 72 mm	121 x 81 x 66 mm	152 x 142 x 76 mm
Net weight	1 kg	670 g	440 g
Compatibility	SCANGRIP CONNECT work lights	-	12 V-18 V CAS battery
Price	€ 74.90	€ 144.90	€ 54.90


PUSH
SCANGRIP
CONNECT

WORK LITE series





	WORK LITE S	WORK LITE M
Product number	03.5667	03.5668
Light source	COB LED	COB LED Spot: High Power LED
LED performance, lumen/W	165	165
Luminous flux, lumen	25-250	35-350 Spot: 75
Iluminance, lux@0.5 m	30-300	40-400 Spot: 600
Adjustable light output	Stepless	Stepless
Beam angle	120°	120°/ 40°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K / 6000 K
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	20	20
Charging time, h	3	3.5
Battery	3.7 V / 1500 mAh Li-ion	3.7 V / 2000 mAh Li-ion
Protection class	IP20 / IK07	IP20 / IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1A	5 V / 1A
Power consumption	Max 3 W	Max 4 W
Charger incl.	No	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	120 x 54 x 24 mm	180 x 54 x 27 mm
Net weight	96 g	160 g
Price	€ 26.90	€ 31.90

FOR MORE INFORMATION ON THE LITE PRODUCT RANGE AT SCANGRIP.COM

STICK LITE series





STAR LITE



	STICK LITE S	STICK LITE M	STAR LITE
Product number	03.5665	03.5666	03.5671
Light source	COB LED	COB LED	COB LED
LED performance, lumen/W	165	130	175
Luminous flux, lumen	20-200 Spot: 50	40-400 Spot: 75	400
Iluminance, lux@0.5 m	28-280 Spot: 380	50-500 Spot: 380	550
Adjustable light output	Stepless	Stepless	No
Beam angle	110°/ 35°	110°/ 35°	-
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K / 6000 K	6000 K / 6000 K	6000 K
Operating time with max. lumen, h	2	2	-
Operating time with min. lumen, h	20	20	-
Charging time, h	2.5	3	-
Battery	3.7 V / 1200 mAh Li-ion	3.7 V / 1800 mAh Li-ion	-
Protection class	IP20 / IK07	IP20 / IK07	IP40 / IK08
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	1 m USB	5 m / 2 x 1.0 mm² H05RN-F
Operating voltage AC	-	-	100-240 V
Charging voltage/current DC	5 V / 1A	5 V / 1A	-
Power consumption	Max 2.5 W	Max 4 W	Max 4.5 W
Charger incl.	No	No	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	150 x 34 x 13 mm	250 x 34 x 15 mm	340 x 40 x 25 mm
Net weight	52 g	88 g	600 g
Price	€ 21.90	€ 31.90	€ 31.90

HEAD LITE series





	HEAD LITE S	HEAD LITE A	HEAD LITE
Product number	03.5645	03.5670	03.5669
Light source	COB LED	COB LED	COB LED Spot: 1 SMD LED
LED performance, lumen/W	100	127	127
Luminous flux, lumen	14-140	15-150	15-150 Spot: 75
Iluminance, lux@0.5 m	20-200	25-250	25-250 Spot: 3000
Adjustable light output	Stepless	Stepless	Stepless
Beam angle	110°	120°/100°	120°/100° Spot: 15°
CRI	Ra > 65	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K / 6000 K
Operating time with max. lumen, h	1	6	1.5
Operating time with min. lumen, h	10	60	15
Charging time, h	-	-	3
Battery	Excl. (use 2 x AAA / 1.5 V Alkaline)	3 x AAA / 1.5 V Alkaline	3.7 V / 800 mAh Li-ion
Protection class	IP30	IP54 / IK07	IP54 / IK07
Impact resistance	1 m	1 m	1 m
Cable	-	-	1 m USB
Operating voltage AC	-	-	-
Charging voltage/current DC	-	-	5V/ 1A
Power consumption	Max 1.5 W	Max 2 W	Max 2 W
Charger incl.	-	-	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	55 x 32.5 x 22 mm	70 x 35 x 40 mm	74 x 41 x 41 mm
Net weight	65 g	100 g	73 g
Price	€ 13.90	€ 21.90	€ 32.90

FLOOD LITE series





	FLOOD LITE S	FLOOD LITE M	FLOOD LITE MC
Product number	03.5660	03.5661	03.5662
Light source	COB LED	COB LED	COB LED
LED performance, lumen/W	170	170	170
Luminous flux, lumen	100-1000	200-2000	1750-3500
Iluminance, lux@0.5 m	140-1400	280-2800	2250-4500
Adjustable light output	Stepless	Stepless	2 levels
Beam angle	120°	120°	120°
CRI	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K
Operating time with max. lumen, h	2	2	-
Operating time with min. lumen, h	20	20	-
Charging time, h	3.5	5	-
Battery	3.6 V / 5000 mAh Li-ion	7.2 V / 5000 mAh Li-ion	-
Protection class	IP54 / IK07	IP54 / IK07	IP54 / IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	1 m USB	5 m / 2 x 1.0 mm² H05RN-F
Operating voltage AC	-	-	100-240 V
Charging voltage/current DC	5 V / 2 A	5 V / 2 A	-
Power consumption	Max 10 W	Max 13 W	Max 30 W
Charger incl.	Yes	Yes	-
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	230 x 135 x 43 mm	275 x 163 x 47 mm	275 x 163 x 47 mm
Net weight	885 g	1.48 kg	1.91 kg
Price	€ 64.90	€ 99.90	€ 106.90

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

VEGA LITE series





AREA LITE 360°



	C VEGA LITE C+R	C VEGA LITE COMPACT	C VEGA LITE	C AREA LITE CO
Product number	03.5451	03.5673	03.5453	03.5637
Light source	66 SMD LED	83 SMD LED	123 SMD LED	168 SMD LED
LED performance, lumen/W	189	189	189	189
Luminous flux, lumen	1250-2500	4000	6000	6000
Iluminance, lux@0.5 m	1900-3800	5500	8500	3000
Adjustable light output	2 levels	No	No	No
Beam angle	100°	100°	100°	360°
CRI	Ra > 80	Ra > 80	Ra > 80	Ra > 80
CCT	6000 K	6000 K	6000 K	6000K
Operating time with max. lumen, h	1.5	-	-	-
Operating time with min. lumen, h	3	-	-	-
Charging time, h	1.5	-	-	-
Battery	11.1 V / 2600 mAh Li-ion	-	-	-
Protection class	IP54 / IK07	IP54 / IK07	IP54 / IK07	IP54 / IK07
Impact resistance	-	-	-	1 m
Cable	5 m / 2 x 0.75 mm² H05RN-F	3 m / 3 x 1.5 mm² H05RN-F	5 m / 3 x 1.5 mm² H07RN-F	5 m / 3 x 1.5 mm² H07RN-F
Operating voltage AC	100-240 V	100-240 V	100-240 V	220-240 V
Charging voltage/current DC	12.6V / 2.4 A	-	-	-
Power consumption	Max 18 W	Max 32 W	Max 45 W	Max 45 W
Charger incl.	Yes	-	-	-
Temperature	-10° to +40°C	-10° to +40°C	-10° to +40°C	-10 to +30 °C
Dimensions	288 x 103 x 280 mm	288 x 103 x 280 mm	318 x 117 x 310 mm	305 x 199 mm
Net weight	2.59 kg	2.46 kg	3.43 kg	2.95 kg
Price	€ 129.90	€ 129.90	€ 149.90	€ 159.90

FLASHLIGHT series







	C MINI LITE A	C PEN LITE A	C POCKET LITE A	C TORCH LITE 400 A	C TORCH LITE 400
Product number	03.5102	03.5150	03.5151	03.5153	03.5154
Light source	LG	CREE XP-G2	CREE XP-G2	CREE	CREE
LED performance, lumen/W	158	142	142	165	165
Luminous flux, lumen	100	100	150	400	400
Iluminance, lux@0.5 m	8000	300-4000	400-6000	800-15000	800-15000
Adjustable light output	No	No	No	No	No
Beam angle	10°	10° - 60°	10° - 60°	10° - 60°	10° - 60°
Beam distance	Up to 80 m	Up to 60 m	Up to 70 m	Up to 120 m	Up to 120
CRI	Ra > 75	Ra > 70	Ra > 70	Ra > 65	Ra > 65
CCT	6000 K	6000 K	6000 K	6000 K	6000 K
Operating time with max. lumen, h	4.5	8	3.5	3	2.5
Operating time with min. lumen, h	-	-	-	-	-
Charging time, h	-	-	-	-	4
Battery	3 x AAA /1.5V Alkaline	2 x AAA /1.5V Alkaline	1 x AA /1.5V Alkaline	2 x C /1.5V Alkaline	3.7 V / 2600mAh Li-ion
Protection class	IP54	IP54 / IK07	IP54 / IK07	IP54 / IK07	IP54 / IK07
Impact resistance	1 m	1 m	1 m	1 m	1 m
Cable	-	-	-	-	1 m USB
Operating voltage AC	-	-	-	-	-
Charging voltage/current DC	-	-	-	-	5 V / 1 A
Power consumption	Max 2 W	Max 1.5 W	Max 1.5 W	Max 5.1 W	Max 4.5 W
Charger incl.	-	-	-	-	No
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø28 x 102 mm	ø19 x 152 mm	ø20 x 110 mm	ø32 x 179 mm	ø29 x 163 mm
Net weight	72 g	55 g	65 g	280 g	182 g
Price	€ 8.90	€ 21.90	€ 21.90	€ 37.90	€ 48.90

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

SCANGRIP flashlights are tested according to the ANSI/NEMA FL1 standard

SCANGRIP®
INNOVATION FROM DENMARK



Penlights





	CM MATCH PEN	CM MATCH PEN R
Product number	03.5117	03.5122
Light source	Ultra high CRI LED	Ultra high CRI LED
Luminous flux, lumen	100	100
Iluminance, lux@0.5 m	300-4000	700-8000
Adjustable light output	No	No
Beam angle	10°-70°	10°-45°
Beam distance	Up to 75 m	Up to 95 m
CRI	Ra › 95	Ra › 92
CCT	4500 K	4500-6500 K
Adjustable CCT	-	2 steps
Operating time with max. lumen, h	2	2.5
Operating time with min. lumen, h	-	-
Charging time, h	-	2.5
Battery	2 x AAA / 1.5 V Alkaline	3.7 V / 1100 mAh Li-ion
Protection class	IP54	IP30
Impact resistance	1 m	1 m
Cable	-	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	-	5 V / 1 A
Power consumption	3 W	Max 2.5 W
Charger incl.	-	Yes
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	ø16 x 148 mm	ø19 x 159 mm
Net weight	60 g	88 g
Price	€ 42.90	€ 54.90


SCANGRIP flashlights are tested according to the ANSI/NEMA FL1 standard

Headlamp




	CM I-MATCH 3
Product number	03.5656
Light source	Ultra high **CRI+** COB LED
Luminous flux, lumen	25-250
Iluminance, lux@0.5 m	60-600
Adjustable light output	Stepless
Beam angle	120°-60°
Beam distance	-
CRI	Ra › 96 **CRI+**
CCT	4500-6500 K
Adjustable CCT	5 steps
Operating time with max. lumen, h	1.5
Operating time with min. lumen, h	15
Charging time, h	3.5
Battery	3.8 V / 1600 mAh Li-poly
Protection class	IP65 / IK07
Impact resistance	1 m
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	5 V / 1 A
Power consumption	Max 2.5 W
Charger incl.	No
Temperature	-10 to +40 °C
Dimensions	100 x 38 x 50 mm
Net weight	100 g
Price	€ 84.90

Handlamps




	CM MINIMATCH	CM SUNMATCH 4
Product number	03.5650	03.5657
Light source	Ultra high **CRI+** COB LED	Ultra high **CRI+** COB LED
Luminous flux, lumen	100-200	50-500 Spot: 200
Iluminance, lux@0.5 m	250-500	700-1400 Spot: 5000
Adjustable light output	2 levels	Stepless
Beam angle	75°	80° Spot: 20°
CRI	Ra › 96 **CRI+**	Ra › 96 **CRI+** Spot: 95
CCT	4500-6500 K	2500-6500 K Spot: 4000 K
Adjustable CCT	2 steps	Stepless
Operating time with max. lumen, h	2	2
Operating time with min. lumen, h	4	10
Charging time, h	4	4
Battery	3.7 V / 1600 mAh Li-ion	3.7 V / 2600 mAh Li-ion
Protection class	IP65	IP65 / IK07
Impact resistance	1 m	1 m
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	5 V / 1 A	5 V / 1 A
Power consumption	Max 3.5 W	Max 8 W
Charger incl.	Yes	No
Temperature	-10 to +40 °C	-10 to +40 °C
Dimensions	156 x 60 x 38 mm	188 x 58 x 26 mm
Net weight	190 g	267 g
Price	€ 94.90	€ 139.90

Kit in bag



	CM ESSENTIAL	CM ULTIMATE
Product number	49.0220	49.0217
Content	I-MATCH 3 MINIMATCH MULTIMATCH R	MATCHPEN R I-MATCH 3 SUNMATCH 4 MULTIMATCH 3 incl. battery/charger
Dimensions	290 x 100 x 190 mm	385 x 115 x 300 mm
Net weight	1.755 kg	4.464 kg
Price	€ 319.90	€ 534.90

C ACCESSORY		Product number	Price
	SCANGRIP DIFFUSER - Small - 4 pcs For MINIMATCH and SUNMATCH 3	03.5778	€ 15.90

Go to page 30 to see other diffusers, suspensions and accessories


MULTIMATCH series






	CM MULTIMATCH R	CM MULTIMATCH 3	CM MULTIMATCH 8
Product number	03.5658	03.5653	03.5654
Light source	Ultra high **CRI+** COB LED	Ultra high **CRI+** COB LED	Ultra high **CRI+** COB LED
Luminous flux, lumen	120-1200	300-3000	800-8000
Iluminance, lux@0.5 m	250-2500	450-4500	1200-12000
Adjustable light output	5 levels	5 levels	5 levels
Beam angle	100°	115°	115°
CRI	Ra > 96 **CRI+**	Ra > 96 **CRI+**	Ra > 96 **CRI+**
CCT	2500-6500 K	2500-6500 K	2500K-6500 K
Adjustable CCT	Stepless	5 steps	5 steps
Operating time with max. lumen, h	0.8	1.5	1
Operating time with min. lumen, h	10	15	10
Charging time, h	3.5	1.5*	1.5*
Battery	3.7 V / 5400 mAh Li-ion	11.1 V / 4000 mAh Li-ion	11.1 V / 8000 mAh Li-ion
Protection class	IP67 / IK07	IP67 / IK07	IP67 / IK07
Impact resistance	1 m	1 m	1 m
Cable	1 m USB	5 m / 2 x 0,75 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F
Charging voltage/current DC	5 V / 2 A	12.6 V / 2.8 A	12.6 V / 6.8 A
Power consumption	Max 16.5 W	Max 30 W	Max 85 W
Battery incl.	-	SPS BATTERY 4 Ah 03.6003	SPS BATTERY 8 Ah 03.6004
Charger incl.	Yes	SPS CHARGING SYSTEM 35 W 03.6006	SPS CHARGING SYSTEM 85 W 03.6008
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	155 x 165 x 64 mm	240 x 230 x 104 mm	305 x 290 x 125 mm
Net weight	820 g	1.97 kg	3.6 kg
Price	€ 134.90	€ 289.90	€ 429.90

* 80%



2 COLOUR LIGHT - 2 step



ALL DAYLIGHT - 5 step


CCT SCAN - Stepless

SEE VIDEO WITH DETAILING AND COLOUR MATCH PRODUCTS

SCANGRIP POWER SOLUTION accessories



C	SPS BATTERY 4Ah	SPS BATTERY 8Ah	SPS CHARGING SYSTEM 35W	SPS CHARGING SYSTEM 85W
Product number	03.6003	03.6004	03.6006	03.6008
Battery	11.1V / 4000 mAh Li-ion	11.1V / 8000 mAh Li-ion	-	-
Charging voltage/current DC	12.6 V / 2.8 A	12.6 V / 6.8 A	12.6 V / 2.8 A	12.6 V / 6.8 A
Cable	-	-	5 m / 2 x 0,75 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F
Charger input voltage	-	-	100-240 V AC 50/60 Hz	100-240 V AC 50/60 Hz
Power consumption	-	-	Max 35 W	Max 85 W
Charging time, h	1.5*	1.5*	-	-
Protection class	IP67 / IK07	IP67 / IK07	IP67 / IK07	IP67 / IK07
Impact resistance	1 m	1 m	1 m	1 m
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	103 x 75 x 40 mm	103 x 75 x 62 mm	139 x 75 x 40 mm	139 x 75 x 49 mm
Net weight	320 g	560 g	650 g	760 g
Price	€ 42.90	€ 74.90	€ 42.90	€ 74.90

* 80%

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

Handlamps


ZONE 2/22


ZONE 0/20

	EX MIDI-EX	EX UNI-EX
Product number	03.5611	03.5617
Light source	COB-LED Spot: SMD LED	COB-LED Spot: SMD LED
Luminous flux, lumen	100-200 Spot: 100	175-350 Spot: 150
Iluminance, lux@0.5 m	140-280 Spot: 600	250-500 Spot: 1200
Adjustable light output	2 levels	2 levels
Beam angle	105° Spot: 60°	100° Spot: 30°
CRI	Ra > 80	Ra > 80
CCT	6000 K	6000 K
Operating time, h	Up to 5 Spot: 2	Up to 15 Spot: 9
Charging time, h	3.5	12
Battery	3.8 V / 1600 mAh Li-ion	3.6 V / 6700 mAh Li-ion
Protection class	IP65	IP65
Impact resistance	1 m	1 m
EX ZONE	2 and 22	0 and 20
Cable	1 m USB	1 m USB
Operating voltage AC	-	-
Charging voltage/current DC	-	-
Power consumption	Max 3 W	Max 3.5 W
Charger incl.	Yes	Yes
Temperature	-20 to +45 °C	-20 to +45 °C
Dimensions	181.8 x 46 x 29 mm	220 x 70 x 39 mm
Net weight	181 g	436 g
Price	€ 104.90	€ 269.90

Headlamp


ZONE 2/22

	EX EX-VIEW
Product number	03.5606
Light source	COB-LED Spot: SMD LED
Luminous flux, lumen	200 Spot: 100
Iluminance, lux@0.5 m	300 Spot: 1000
Adjustable light output	No
Beam angle	100° Spot: 35°
CRI	Ra > 80
CCT	6000 K
Operating time, h	Up to 2.5 Spot: 3.5
Charging time, h	3.5
Battery	3.8 V / 1600 mAh Li-ion
Protection class	IP65
Impact resistance	1 m
EX ZONE	2 and 22
Cable	1 m USB
Operating voltage AC	-
Charging voltage/current DC	-
Power consumption	Max 1.6 W
Charger incl.	Yes
Temperature	-20 to +45 °C
Dimensions	95 x 55 x 43 mm
Net weight	142 g
Price	€ 104.90

SEE VIDEO WITH THE EX PROOF PRODUCTS

NOVA-EX series


ZONE 1/21


ZONE 1/21

	EX NOVA-EX	EX NOVA-EX R
Product number	03.5619	03.5618
Light source	High CRI COB LED	High CRI COB LED
Luminous flux, lumen	1700-3400	2000-4000
Iluminance, lux@0.5 m	2900-5800	3000-6000
Adjustable light output	2 levels	2 levels
Beam angle	110°	100°
CRI	Ra > 95	Ra > 95
CCT	6000 K	6000 K
Operating time, h	-	Up to 4 h
Charging time, h	-	3
Battery	-	21.6 V/3350 mAh Li-ion
Protection class	IP65	IP65
Impact resistance	1 m	1 m
EX ZONE	1 and 21	1 and 21
Cable	10 m / 3 x 1 mm² H05RN-F	5 m / 2 x 0,75 mm² H05RN-F
Operating voltage AC	100-240V 50/60 Hz	-
Charging voltage/current DC	-	21.6V / 1A
Power consumption	35 W	31W
Charger incl.	-	Yes
Temperature	-20 to +45 °C	-20 to +45 °C
Dimensions	270 x 266 x 123 mm	270 x 261 x 130 mm
Net weight	5.3 kg	4.3 kg
Price	€ 439.90	€ 699.90

EX ACCESSORIES		Product number	Price
 ZONE 1/21	MAGNETIC BRACKET EX For flexiable positioning on any magnetic surface.	03.5616	€ 59.90
 ZONE 1/21	SCAFFOLDING BRACKET EX Designed to fix NOVA-EX work lights on scaffoldings or any round object ø40-50 mm.	03.5609	€ 39.90
 ZONE 1/21	TRIPOD EX 1.35 - 3 m.	03.5607	€ 139.90

SCANGRIP accessories are approved to be used in explosive atmosphere, zone 1 and 21, in combination with NOVA-EX and NOVA-EX R

GENERAL work lights A B C D E

SPECIALIZED work lights CM EX UV

SCANGRIP®
INNOVATION FROM DENMARK



UV CURING series





SPS SCANGRIP POWER SOLUTION

Incl. UV-PROTECTION GLASSSES and NYLON BAG


	UV-PEN	UV-LIGHT	NOVA-UV S	UV-GUN
Product number	03.5800	03.5801	03.5802	03.5803
Light source	UV LED	UV LED	UV LED	UV LED
Irradiance	At 3 cm distance Curing diameter: ø5 cm Min. irradiance: 18mW/cm² Center irradiance: 42 mW/cm²	At 6 cm distance Curing diameter: ø10 cm Min. irradiance: 6 mW/cm² Center irradiance: 16 mW/cm²	At 6 cm distance Curing diameter: ø10 cm Min. irradiance: >35 mW/cm² Center irradiance: 70 mW/cm² At 16 cm distance Curing diameter: ø25 cm Min. irradiance: >6 mW/cm² Center irradiance: 12 mW/cm²	At 10 cm distance Curing diameter: ø18 cm Min. irradiance: >68 mW/cm² Center irradiance: 340 mW/ cm² At 56cm distance Curing diameter: ø68cm Min. irradiance: >6 mW/cm² Center irradiance: 14 mW/cm²
Curing area	20 cm²	75 cm²	75 cm² at 6 cm distance 490 cm² at 16 cm distance	250 cm² at 10 cm distance 3600 cm² at 56 cm distance
Wavelength	390-400 nm	390-400 nm	395-400 nm	395-400 nm
Operating time with max. lumen	1	1.5	1.5	40 min
Operating time with min. lumen	-	-	-	-
Charging time, h	4	4	3.5	2*
Battery	3.7 V / 1100 mAh	3.7 V / 2600 mAh	3.7 V / 5400 mAh	11.1 V / 8000 mAh
Protection class	IP30	IP30	IP30	IP30
Impact protection	IK07	IK07	IK07	IK06
Impact resistance	1 m	1 m	1 m	1m
Cable	1 m USB	1 m USB	1 m USB	5 m / 2 x 0,75 mm2 H05RN-F
Charging voltage/current DC	5 V / 1 A	5 V / 1 A	5 V / 2 A	12.6 V / 4 A
Power consumption	3 W	3 W	12 W	120 W
Battery incl.				SPS BATTERY 03.6004
Charger incl.	Yes	Yes	Yes	SPS CHARGING SYSTEM 50 W 03.6007
Temperature	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C	-10 to +40 °C
Dimensions	ø19 x 159 mm	190 x 60 x 32 mm	163 x 63 x 163 mm	215 x 96 x 300 mm
Net weight	88 g	270 g	705 g	1.89 kg incl. battery
Price	€ 106.90	€ 171.90	€ 417.90	€ 1273.90

*80%

SCANGRIP POWER SOLUTION accessories



SPS BATTERY 8Ah	SPS CHARGING SYSTEM 50W
03.6004	03.6007
11.1 V / 8000 mAh Li-ion	-
12.6 V / 6.8 A	12.6 V / 4 A
-	5 m / 2 x 0,75 mm2 H05RN-F
-	100-240 V AC 50/60 Hz
-	Max 50 W
1.5*	-
IP67 / IK07	IP67 / IK07
1 m	1 m
-10 to +40 °C	-10 to +40 °C
103 x 75 x 62 mm	139 x 75 x 49 mm
560 g	700 g
€ 74.90	€ 53.90

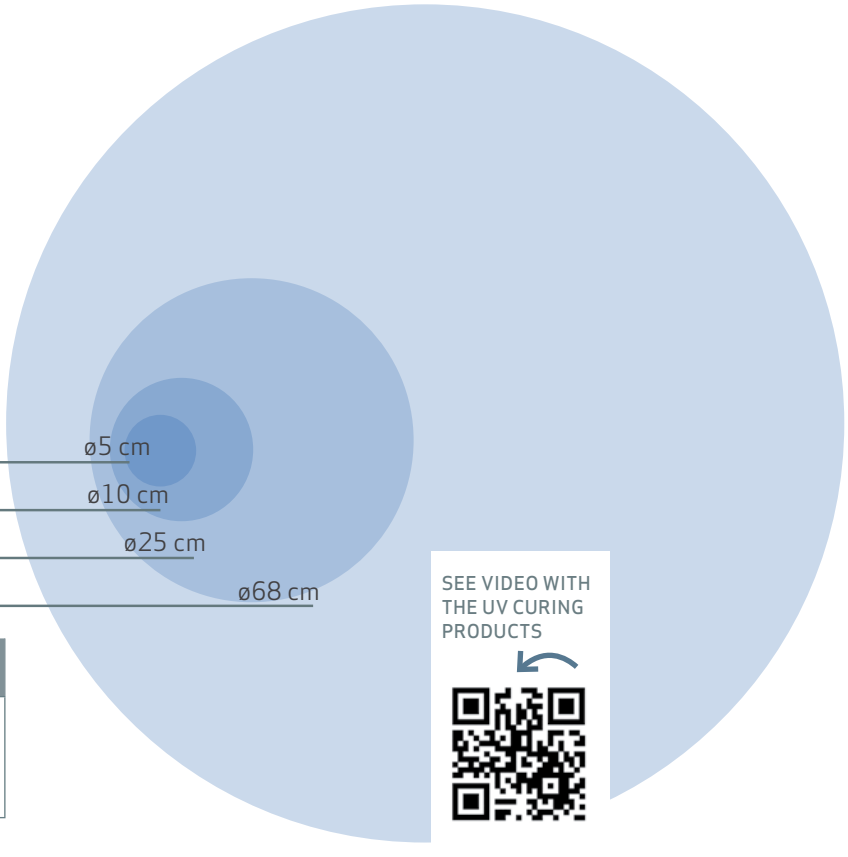

SEE VIDEO WITH THE UV CURING PRODUCTS

ACCESSORY		Product number	Price
	UV PROTECTION GLASSES Verified protection against the complete UV spectrum up to 400 nm.	03.5759	€ 21.90


UV CURING series





UV	UV-EXTREME	UV-EXTREME PLUS
Product number	03.5272	03.5273
Light source	UV LED	UV LED
Irradiance	At 60 cm distance Curing diameter: ø 95 cm Min. irradiance: >6 mW/cm² Center irradiance: 16 mW/cm² At 40 cm distance Curing diameter: ø 90 cm Min. irradiance: >6 mW/cm² Center irradiance: 35 mW/cm² At 10 cm distance Curing diameter: ø 22 cm Min. irradiance: >80 mW/cm² Center irradiance: 398 mW/cm²	At 80 cm distance Curing size: 135x130 cm Min. irradiance: >6 mW/cm² Center irradiance: 18 mW/cm² At 40 cm distance Curing size: 110x100 cm Min. irradiance: >6 mW/cm² Center irradiance: 68 mW/cm² At 10 cm distance Curing size: 34x24 cm Min. irradiance: >120mW/cm² Center irradiance: 490mW/cm²
Curing area	7000 cm² at 60 cm distance 6300 cm² at 40 cm distance 380 cm² at 10 cm distance	13000cm² at 80 cm distance 8600cm² at 40 cm distance 640cm² at 10 cm distance
Wavelength	395-400nm	395-400nm
Protection class	IP30	IP30
Impact protection	IK08	IK08
Impact resistance	1 m	1m
Cable	5 m / 2x1.0 mm² H05RN-F	5 m / 2x1.0 mm² H05RN-F
Operating voltage AC	220-240 V	220-240 V
Charging voltage/current DC	-	-
Power consumption	300 W	600 W
Temperature	-10° to +40°C	-10° to +40°C
Dimensions	278 x 241 x 160 mm	415 x 241 x 160 mm
Net weight	4.95 kg	6.70 kg
Price	€ 1999.90	€ 2999.90

Verified UV protection face visor is included



UV ACCESSORY		Product number	Price
	MOUNTING BRACKET FOR UV-EXTREME and UV-EXTREME PLUS on 03.5682 WHEEL STAND	03.5915	€ 49.90



03.5682 WHEEL STAND

COMPATIBILITY

SCANGRIP specialized LED work lights for UV CURING has been tested and proven successfully on leading brands of UV-cured products.



Scan the QR code



All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

SCANGRIP Accessories

To give you maximum flexibility, we have made a complete concept of accessories that allow you to place the lamps exactly where you need it wherever you are.

C Product description		Function	Compatibility	Product number	Price
	SCANGRIP DIFFUSER MEDIUM Diffuses and softens the light		NOVA R MULTIMATCH R NOVA 2 CONNECT	03.5922	€ 8.90
	SCANGRIP DIFFUSER Provides a large dispersion and spreads the light		MULTIMATCH 3 NOVA 4K, 4K C+R NOVA 4 CONNECT NOVA 4 SPS	03.5750	€ 10.90
	SCANGRIP DIFFUSER - Large Provides a large dispersion and spreads the light		MULTIMATCH 8 NOVA 6K, 6K C+R, 12K NOVA 10 CONNECT NOVA 6, 10 SPS	03.5751	€ 15.90
	SCAFFOLDING BRACKET For flexible positioning on scaf-foldings or any round object ø40-50 mm		FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA 4, 6, 10 SPS NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT	03.5341	€ 31.90
	MAGNET BRACKET For flexible positioning of the work light on any magnetic surface		MULTIMATCH 3 NOVA 4K, 4K C+R NOVA 4 SPS NOVA 4 CONNECT	03.5390	€ 31.90
	MAGNET BRACKET - Large For flexible positioning of the work light on any magnetic surface		MULTIMATCH 3, 8 NOVA 6K, 6K C+R, 12K, 4K, 4K C+R NOVA 4, 6, 10 SPS NOVA 4, 10 CONNECT	03.5391	€ 54.90
	C+R CAR ADAPTER For easy charging on the go with DUAL SYSTEM 2 in 1 products		LINE LIGHT BONNET C+R LINE LIGHT C+R NOVA 4K C+R, 6K C+R VEGA LITE C+R	03.5342	€ 31.90



C Product description		Function	Compatibility	Product number	Price
	SCANGRIP TRIPOD 2M 0.78 - 2 m		AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO AREA 10 SPS FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA 4, 6, 10 SPS NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT DUO CONNECT	03.5685	€ 84.90
	SCANGRIP TRIPOD 3M 1.35 - 3 m		AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO AREA 10 SPS FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA 4, 6, 10 SPS NOVA UV-S STAR VEGA LITE, C+R, COMPACT SITE LIGHT 30, 60 UV-EXTREME UV-EXTREME PLUS	03.5431	€ 119.90
	SCANGRIP WHEEL STAND 0.9 -1.9 m		AREA 6 CONNECT AREA 10 CONNECT AREA LITE CO AREA 10 SPS FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA 4, 6, 10 SPS NOVA UV-S STAR VEGA 2, 4 CONNECT VEGA LITE, C+R, COMPACT UV-EXTREME UV-EXTREME PLUS	03.5682	€ 149.90
	DUAL BRACKET Dual bracket for positioning of two lamps on TRIPOD 3M and WHEEL STAND		FLOOD LITE M, MC, S MULTIMATCH R, 3, 8 NOVA R, 4K, 4K C+R, 6K, 6K C+R, 12K NOVA 4, 10 CONNECT NOVA 4, 6, 10 SPS NOVA UV-S STAR VEGA LITE, C+R, COMPACT	03.5308	€ 26.90

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

Technical terms and details in 11 languages

SCANGRIP is known worldwide for its wide and comprehensive ranges of LED work lights. In the table below, you can find all the technical terms in a range of languages.

UK	DE	FR	IT
Product number	Artikelnummer	Référence	Codice prodotto
Light source	Lichtquelle	Source lumineuse	Sorgente luminosa
LED performance, lumen/W	LED-Lichtausbeute, Lumen/W	LED performance, lumens/W	Prestazioni LED, lumen/W
Luminous flux, lumen	Lichtstrom, Lumen	Lumens	Flusso luminoso, lumen
Iluminance, lux@0.5 m	Lichtstärke, Lux@0,5 m	Lux à 0,5 m	Illuminamento, lux@0.5 m
Adjustable light output	Einstellbare Lichtausbeute	Réglage de la puissance	Rendimento luminoso regolabile
Beam angle	Abstrahlwinkel	Angle faisceau	Angolo del fascio
Beam distance	Leuchtweite	Distance faisceau	Distanza fascio
Irradiance	Bestrahlungsstärke	Irradiance	Irraggiamento
Curing area	Härtefläche	Zone de durcissement	Superficie di essiccazione
Wavelength	Wellenlänge	Longueur d'onde	Lunghezza d'onda
CRI	Farbwiedergabeindex	IRC	CRI
CCT	Farbtemperatur	TCP	CCT
Operating time with max. lumen, h	Betriebsdauer mit max. Lumen, Std.	Autonomie avec lumens maxi. (h)	Ore auton. a max. potenza lumen
Operating time with min. lumen, h	Betriebsdauer mit min. Lumen, Std.	Autonomie avec lumens mini, (h)	Ore auton. a min. potenza lumen
Operating time: backup battery, h	Betriebsdauer: Reserveakku, Std.	Autonomie batterie de secours, (h)	Autonomia: batteria tampone, h
Charging time, h	Ladedauer, Std.	Temps de charge (h)	Tempo di ricarica, h
Battery	Akku	Batterie	Batteria
Protection class	IP-Schutzart	Etanchéité	Classe di protezione
Impact protection	Stoßfestigkeitsgrad	Protection contre les chocs	Protezione contro gli urti
Impact resistance	Stoßfestigkeit	Résistance aux chocs	Resistenza alle cadute
Operating voltage AC	Nennspannung AC	Tension d'alimentation	Tensione di esercizio AC
Charging voltage /current DC	Ladespannung/Ladestrom DC	Tension de charge	Tensione di ricarica / corrente continua
Cable	Kabel	Câble	Cavo
Charger input voltage	Eingangsspannung	Tension d'alimentation	Tensione del caricabatterie
Output power	Ausgangsleistung	Consommation	Potenza di uscita
Power consumption	Leistungsaufnahme	Consommation électrique	Consumo di corrente
Battery incl.	Einschl. Akku	Batterie incluse	Batteria incl.
Charger incl.	Mit Ladegerät	Chargeur inclus	Caricabatterie incl.
SCANGRIP power supply incl.	SCANGRIP Stromversorgung einschl.	Alimentation SCANGRIP incluse	Alimentatore SCANGRIP incl.
Temperature	Temperatur	Température d'utilisation	Temperatura
Dimensions	Abmessungen	Dimensions	Dimensioni
Net weight	Nettogewicht	Poids net	Peso netto
Price	Preis	Prix	Prezzo

PT	ES	SE	DK
Número do artigo	Referencia de producto	Artikelnummer	Produktnummer
Fonte de luz	Fuente de luz	Ljuskälla	Lyskilde
Performance LED, lúmen/W	Rendimiento LED, lumen/W	LED-prestanda, lumen/W	LED virkningsgrad, lumen/W
Fluxo luminoso, lúmen	Flujo luminoso, lumen	Ljusflöde, lumen	Lysstrøm, lumen
Iluminação,lux@0,5 m	Iluminación lux@0.5 m	Illuminans, lux@0,5 m	Belysningsstyrke, lux@0,5 m
Intensidade de luz ajustável	Intensidad de luz ajustable	Justerbart ljusflöde	Justerbart lysudbytte
Ângulo de luz	Ángulo de luz	Strålvinkel	Lysvinkel
Distância do feixe	Distancia del haz	Strålavstånd	Lyskeglelængde
Irradiação	Irradición	Irradians	Bestrålingsstyrke
Área de secagem	Área de secado	Härdningsarea	Hærdeområde
Comprimento de onda	Longitud de onda	Våglängd	Bølgelængde
CRI	IRC	CRI	Farvegengivelse
CCT	CCT	CCT	Farvetemperatur
Tempo de funcionamento com máx. lumens, h	Autonomía a máxima potencia (h.)	Driftstid med max. lumen, timmar	Driftstid med max. lumen
Tempo de funcionamento com mín. lumens, h	Autonomía a mínima potencia (h.)	Driftstid med min. lumen, timmar	Driftstid med min. lumen
Tempo de funcionamento com bateria interna, h	Autonomía con batería interna (h.)	Driftstid: reservbatteri, timmar	Driftstid backup batteri
Tempo de carregamento, h	Tiempo de carga (h.)	Laddningstid, timmar	Ladetid
Bateria	Batería	Batteri	Batteri
Classe de proteção	Clase de protección	Skyddsklass	IP-klasse
Proteção contra impacto	Protección contra impactos	Slagskydd	IK-klassifikation
Resistência a impactos	Resistencia al impacto	Stöttålighet	Faldtest
Tensão operacional AC	Tensión de funcionamiento CA	Driftspänning AC	Driftsspænding AC
Tensão de carregamento/ corrente DC	Tensión/corriente DC de carga	Laddningsspänning/befintlig DC	Ladespænding DC
Cabo	Cable	Kabel	Kabel
Tensão de entrada do carregador	Voltaje de entrada cargador	Inspänning, laddare	Lader, indgangsspænding
Potência de saída	Potencia de salida	Uteffekt	Udgangseffekt
Cosumo de energia	Consumo energía	Energiförbrukning	Effektforbrug
Bateria incl.	Batería incl.	Inkl. batteri	Inkl. batteri
Carregador incl.	Cargador incl.	Inkl. laddare	Inkl. lader
Fonte de energia incluída	SCANGRIP Power Supply incl.	Inkl. SCANGRIP strömförsörjning	Inkl. SCANGRIP strømforsyning
Temperatura	Temperatura	Temperatur	Driftstemperatur
Dimensões	Dimensiones	Mått	Dimensioner
Peso líquido	Peso neto	Nettovikt	Nettovægt
Preço	Precio	Pris	Pris

See next page for NL- PL- CZ

All prices are gross prices, VAT exclusive and subject to change without notice, errors and omissions excepted.

Technical terms and details in 11 languages

SCANGRIP is known worldwide for its wide and comprehensive ranges of LED work lights. In the table below, you can find all the technical terms in 11 languages.

UK	NL	PL	CZ
Product number	Productnummer	Numer produktu	Číslo výrobku
Light source	Lichtbron	Źródło światła	Zdroj světla
LED performance, lumen/W	LED-prestaties, lumen/W	Wydajność LED, lumen/W	Výkon LED, lumen/W
Luminous flux, lumen	Lichtstroom, lumen	Strumień świetlny, lumen	Světelný tok, lumen
Iluminance, lux@0.5 m	Verlichting, lux@0,5 m	Natężenie oświetlenia, luksy z 0,5 m	Osvětlení, lux ve vzdálenosti 0,5 m
Adjustable light output	Aanpasbare lichtopbrengst	Regulowana moc świetlna	Nastavitelný světelný výkon
Beam angle	Stralingshoek	Kąt wiązki	Úhel paprsku
Beam distance	Stralingsafstand	Zasięg wiązki	Vzdálenost paprsku
Irradiance	Bestraling	Natężenie promieniowania	Ozáření
Curing area	Uithardingsgebied	Obszar utwardzania	Vytvrzovací plocha
Wavelength	Golflengte	Długość fali	Vlnová délka
CRI	CRI	CRI	Index podání barev, CRI
CCT	CCT	CCT	Náhradní teplota chromatičnosti, CCT
Operating time with max. lumen, h	Bedrijfstijd met max. lumen, u	Czas pracy przy maks. natężeniu światła, w godz.	Provozní doba s max. lumenů, h
Operating time with min. lumen, h	Bedrijfstijd met min. lumen, u	Czas pracy przy min. natężeniu światła, w godz.	Provozní doba s min. lumenů, h
Operating time: backup battery, h	Bedrijfstijd: back-upaccu, u	Czas pracy: akumulator awaryjny, w godz.	Provozní doba: záložní baterie, h
Charging time, h	Oplaadtijd, u	Czas ładowania, w godz.	Doba nabíjení, h
Battery	Accu	Akumulator	Baterie
Protection class	Beschermingsklasse	Stopień ochrony	Třída ochrany
Impact protection	Stootbeveiliging	Ochrona przed uderzeniami	Ochrana při nárazu
Impact resistance	Stootweerstand	Odporność na uderzenia	Odolnost proti nárazu
Operating voltage AC	Bedrijfsspanning AC	Napięcie robocze AC	Provozní napětí AC
Charging voltage /current DC	Laadspanning/-stroom DC	Napięcie/prąd ładowania DC	Nabíjecí napětí/proud DC
Cable	Kabel	Kabel	Kabel
Charger input voltage	Ingangsspanning lader	Napięcie wejściowe ładowarki	Vstupní napětí nabíječky
Output power	Uitgangsvermogen	Moc wyjściowa	Výstupní výkon
Power consumption	Energieverbruik	Zużycie energii	Příkon
Battery incl.	Accu inbegrepen	Bateria w zestawie	Včetně baterie
Charger incl.	Lader inbegrepen	Ładowarka w zestawie	Včetně nabíječky
SCANGRIP power supply incl.	SCANGRIP-voeding inbegrepen	Zasilacz SCANGRIP w zestawie	Včetně napájecího zdroje SCANGRIP
Temperature	Temperatuur	Temperatura	Teplota
Dimensions	Afmetingen	Wymiary	Rozměry
Net weight	Netto gewicht	Masa netto	Čistá hmotnost
Price	Prijs	Cena	Cena


SCANGRIP
CONNECT

SCANGRIP®

INNOVATION FROM DENMARK

ORIGINAL SCANGRIP

SINCE 1906

// SCANGRIP is Europe's leading manufacturer of work lights for professionals providing the strongest and most comprehensive ranges of work lights with the latest LED lighting technology available on the market.

SCANGRIP is innovation from Denmark and receives strong recognition in the marketplace for its product design, and the products are known for their high quality.

SCANGRIP strives for perfection, and is continuously optimizing and improving light output, battery capacity, design and ergonomics, durability, user-friendliness, and functionality. The aim is to set new standards for professional work lights.

SCANGRIP was established in 1906 and has a long, impressive history of manufacturing high-quality hand tools and work lights for the industrial, construction, and automotive sectors.

SCANGRIP is part of Hultafors Group - a global company offering a unique portfolio of premium brands within personal protection, tools, and other equipment for discerning craftsmen. Together, we are on a mission to create a better day for professional users.

SCANGRIP.COM

Follow us at

// SCANGRIP A/S Rytterhaven 9 DK-5700 Svendborg DENMARK Tel +45 6320 6320 scangrip@scangrip.com

All prices are gross prices valid from 1 January 2023, VAT exclusive and subject to change without notice, errors and omissions excepted.

49.0041-PRICELIST-2023-1